

## DS-PA201PG-16WB Control Panel



- Simple and elegant appearance design
- Wi-Fi and GPRS network for cloud communication
- Friendly app interface makes installation and use easier
- Up to 2000 m radio signal transmission range in open space

## ▪ Specification

| Capacity                               |   |
|--|---|
| ARC                                    | 1   |
| Installer                              | 1   |
| User                                   | 14  |
| Areas                                  | 4   |
| Wireless zones                         | 16  |
| Wireless keypads                       | 4   |
| Wireless sounders                      | 4   |
| Admin                                  | 1   |
| Wireless keyfobs                       | 16  |
| Logs                                   | 1000  |
| Communication                          |   |
| Transmission technology                | 433.1-433.7 MHz   |
| Transmission range (free space)        | up to 1,200 m   |
| Maximum effective radiated power (ERP) | 25 mW max   |
| Radio signal modulation                | 2GFSK   |
| Encryption                             | AES-128   |
| Ethernet                               | 1 8P8C socket   |
| Ethernet speed                         | ≤10Mbps   |
| Wi-Fi                                  | 802.11 b/g/n  |
| Cellular                               | GPRS  |
| SIM slots                              | 1   |
| Notifications                          |   |
| APP notifications                      | Yes   |
| SMS notifications                      | Yes   |
| Calls notifications                    | Yes   |
| ARC notifications                      | Yes   |
| Event types                            | Alarms<br>Faults<br>System Events<br>Operations                                   |
| Software features                      |   |
| Upgrade OTA                            | Yes   |
| Protocol                               | SIA-DCS<br>*SIA-DCS<br>ADM-CID<br>*ADM-CID<br>OTAP<br>Other proprietary protocols |
| Indication                             |   |
| Indication method                      | LED   |
| Hardware features                      |   |
| Tamper-Proof                           | Yes   |


| Electrical characteristics   |  |
|------------------------------|--|
| Built-in backup battery      | Yes  |
| Battery life                 | Up to 12 hours at normal temperature (The battery working time can be significantly reduced at low temperatures) |
| Battery charging temperature | 0 °C to +40 °C   |
| General                      |  |
| Dimension (W×H×D)            | 165 x 165 x 37.5 mm  |
| Weight                       | 407 g  |
| Operation temperature        | -10 °C to +55 °C   |
| Operation humidity           | 10% to 90%   |
| Shell material               | Plastic  |

▪ **Available Model**

DS-PA201PG-16WB

▪ **Accessory**

▪ **Included**

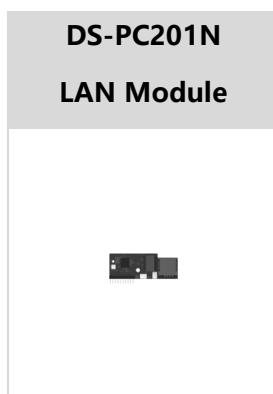

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

