

DS-K1T672MW Face Recognition Terminal



- Forced mask wearing alert: If the recognizing face does not wear a mask, the device will prompt a voice reminder. At the same time, the authentication or attendance will be failed
- Face mask wearing alert: If the recognizing face does not wear a mask, the device will prompt a voice reminder. At the same time, the authentication or attendance is valid
- 7-inch touch screen with bezel-less design
- Presents card on the screen to authenticate card permission
- Face recognition. Distance: 0.3 m to 3 m, Duration < 0.2 s/User, Accuracy rate ≥ 99%, 50,000 face capacity, 50,000 card capacity (M1 card), and 50,000 event capacity
- Supports wiegand protocol and RS-485 protocol
- Two-way audio with indoor station and main station
- Configuration via the web client
- Supports ISAPI and ISUP5.0 protocol

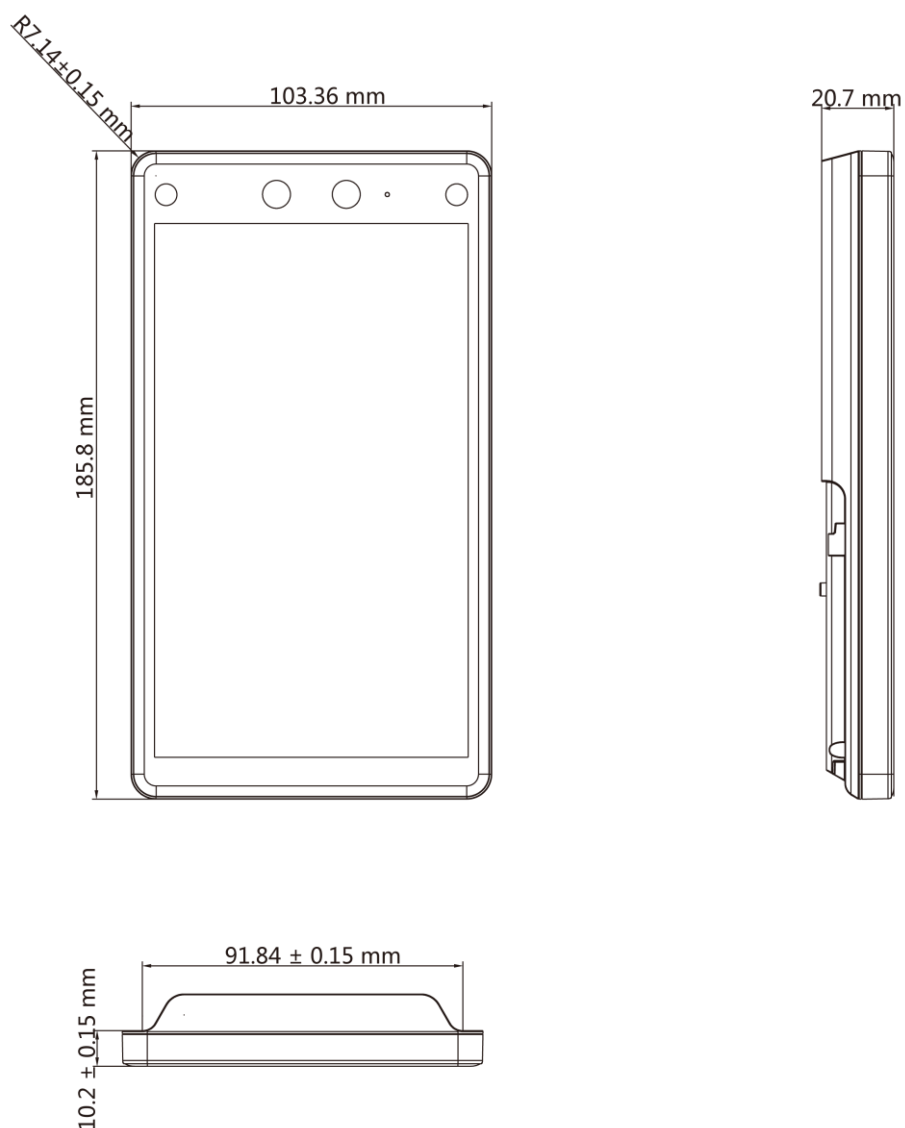
▪ Specification

Display	
Screen size	7 inch
Operation method	Capacitive touch screen
Type	LCD
Video	
Lens	Visible light lens × 1, 850nm Infrared lens × 1
Resolution	2 MP
FOV	HFOV = 75.5°; VFOV = 41.5°; DFOV = 87°
Audio	
Audio quality	Noise Suppression and Echo Cancellation
Network	
Wired network	Support
Wi-Fi	Support, 2.4 G, 802.11b/g/n
Interface	
Network interface	1 RJ-45, 10/100/1000 M self-adaptive
Lock control	1
Exit button	1
Door contact input	1
Alarm input	2
Alarm output	1
TAMPER	1
RS-485	1 RS-485 (Half duplex, HIKVISION)
Wiegand	1 Wiegand (Hik 26bit, Hik 34bit)
USB	1
Authentication	
Card type	M1 card
Card reading frequency	13.56 MHz
General	
Power supply	12 VDC, 2 A
Working temperature	-10 °C to 50 °C (-58 °F to 122 °F)
Working humidity	0 to 90% (No condensing)
Dimensions	185.8 × 103.36 × 20.7mm (7.31" × 4.07" × 0.81")
Installation	Surface mounting
Language	English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Portuguese (Brazil)
Platform	Hik-ProConnect and HikCentral Professional
Function	
QR code recognition	Support
Face anti-spoofing	Support

▪ Available Model




DS-K1T672MW

▪ **Dimension**



▪ **Accessory**

▪ **Optional**

DS-KAB6-D1 Base Bracket	DS-KAB671-P2 Stand Stick	DS-KAB6-W1 Bracket
		

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

