



X7

Fingerprint Standalone Access Control Terminal



Fingerprint



RFID



Random
Passcode



ZKTeco's X7 is an economical and convenient standalone access control terminal which provides various authentication, including fingerprint verification, RFID cards (125kHz/13.56MHz) and password.

Equipped with a lock interface, door sensor, exit button, alarm, and doorbell, the X7 offers a comprehensive range of features to enhance security and convenience. What's more, the X7 requires no supporting software and can independently manage user access and parameters, such as adding and deleting users and configuring access control settings.

Experience the reliability of the X7 for your access control needs and protecting your property security.


Feature:

- A Convenient and cost-saving standalone Access Control Terminal
- Versatile Authentication methods: Fingerprint, RFID cards (125kHz/13.56MHz) and pin code passwords
- Improved fingerprint verification algorithm with ZK Finger v10.0
- Expanded Capacity: 500 user cards, 500 fingerprints, and 8 group passwords (4 digits)

Specifications

| | |
|--------------------------|---|
| Model | X7 |
| User Card Capacity | 500 |
| Fingerprint Capacity | 500 |
| Password Group | 8 |
| Password digit | 4 |
| Fingerprint Algorithm | ZK Finger v10.0 |
| Supported RFID Card Type | 125kHz; 13.56MHz |
| Access Control Interface | 3rd party electric lock, alarm, door sensor, exit button and doorbell |
| Power | 12V 3A |
| Operating Temperature | 0°C to 40°C |
| Store Temperature | -10°C to 50°C |
| Dimension(L*W*H) | 88*88*33.6mm |
| Net Weight | 0.14kg |

Configuration

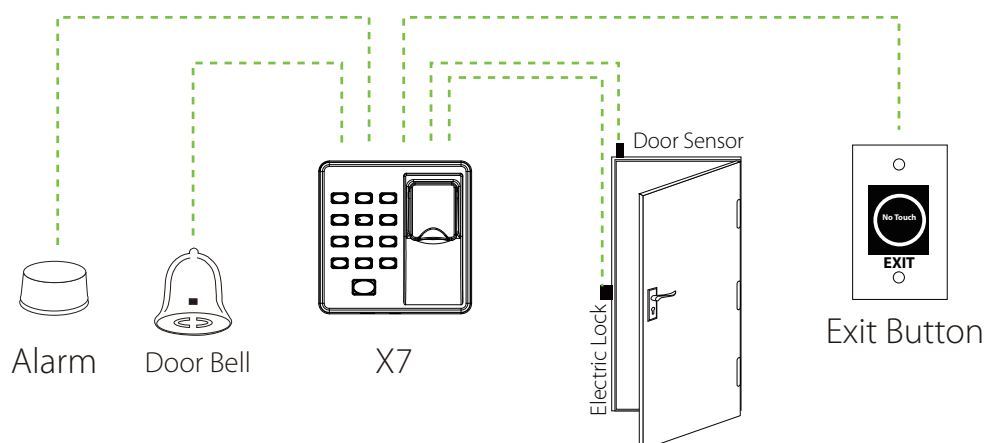

Dimensions (mm)

